(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau





(43) International Publication Date 23 June 2005 (23.06.2005)

PCT

(10) International Publication Number WO 2005/057733 A1

(51) International Patent Classification7:

H01R 13/24

(21) International Application Number:

PCT/FI2004/000736

(22) International Filing Date: 3 December 2004 (03.12.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 20031804

10 December 2003 (10.12.2003)

- (71) Applicant (for all designated States except US): YOKOWO CO. LTD. [JP/JP]; 5-11, Takinogawa 7-chome, Kita-ku, Tokyo 114-8515 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): TOIVANEN, Seppo [FI/FI]; Seppälänkuja 3 A 10, FI-01800 Klaukkala (FI). ARAI, Yoshitaka [JP/JP]; c/o Yokowo Co. Ltd., Tomioka Plant 1112 Kanohara, Tomiokashi, Gunma 370-2495 (JP).
- (74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O. Box 148, FI-00121 Helsinki (FI).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available); ARIPO (BW. GH. GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


of inventorship (Rule 4.17(iv)) for US only

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CONNECTOR

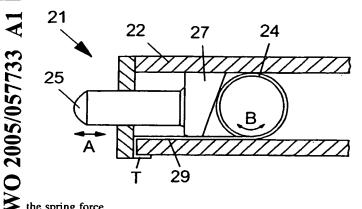

the spring force.

(57) Abstract: The invention relates to a connector (11) comprising a housing (12), a spring biased contact surface (15) facing in a front direction of said connector for establishing a contact with a connector counterpart, said contact surface being movable within a working area against a spring force from a first rest position to a second connecting position by a force directed to the contact surface (15) upon establishing a contact with the connector counterpart. In order to achieve a connector with makes it possible to keep the contact force at an appropriate and substantially constant level, said connector comprises a rolled spring (14) with an outer end (19) protruding in said front direction of said connector. Said protruding end (19) is attached to the housing of said contact surface (15) is moved against